




Front view

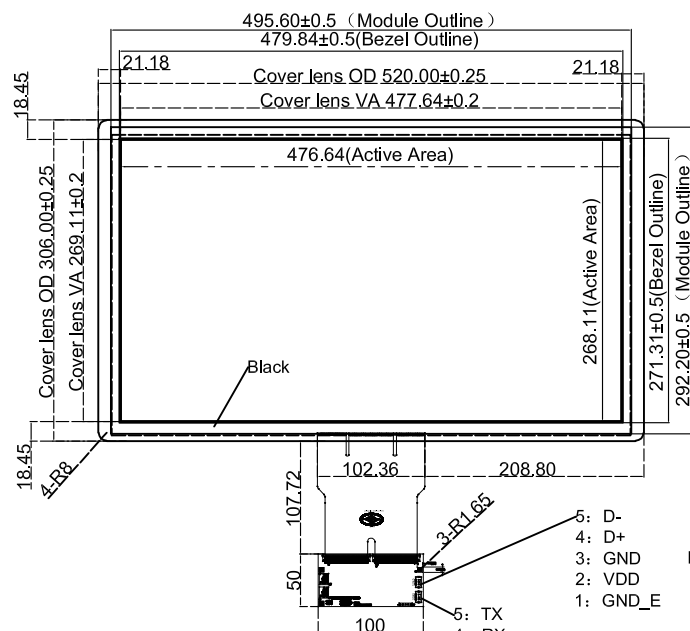

Side view

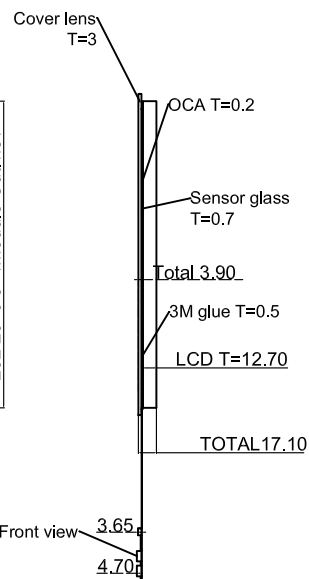

Back view

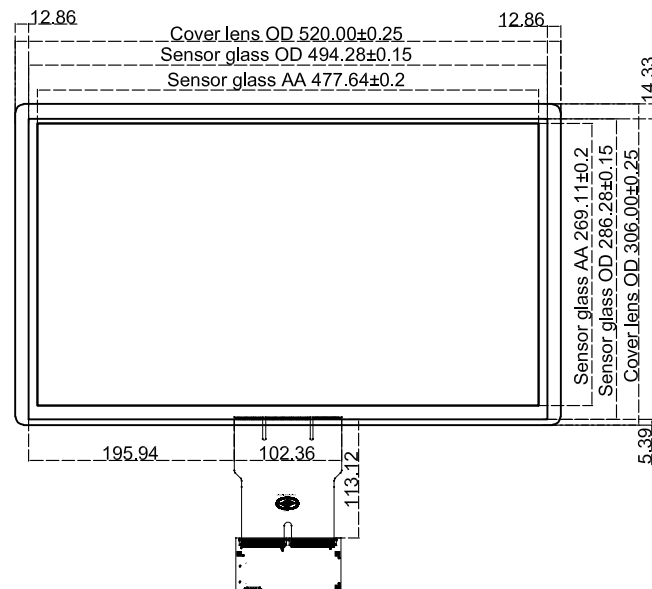

Technical Parameters

0:Interface :USB

1: Touch point: 10

2: Cover lens + Sensor glass + OCA+FPC

3: Cover lens Thickness = 3mm

4: Sensor glass Thickness = 0.7mm

5: OCA Thickness = 0.2mm

6: Total Thickness = 3.90 mm

7: Sensor Process: Exposure ITO Pattern + laser Ag(Metal line)

8: Input Voltage 3.5V~5.5V.Typical 5V

9:Transmittance:>85%

10: Surface Hardness:>6H

11: Operating Conditions :-10 to 70 °C

12: Storage Conditions :-20 to 70 °C

13: Relative Humidity:95% at 60 °C, RH Non-condensing

14: Dimension tolerance:±0.2mm

15: AA=Active Area;OD=Outline Dimeesion;VA=View Area

JFC INDUSTRIAL CO. LTD						
Drawing	Sun	2016.11.15	Material	Glass	21.5"	
Checked	Chen		Scale	1:1		
Approved	Sim		Units	mm	Drawing Name	21.5 CTP
Page1/1					Drawing No.	JFC215CMYY.V0