




Front View

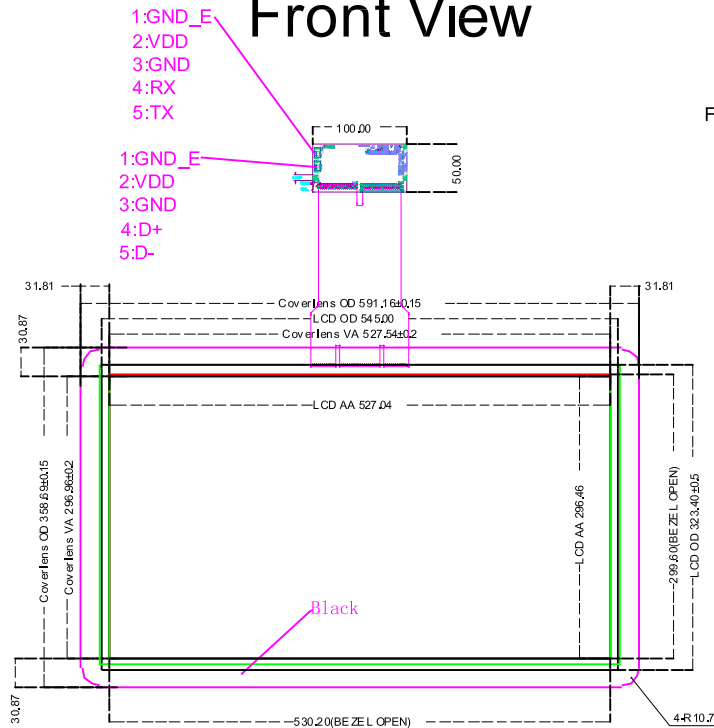

Side View

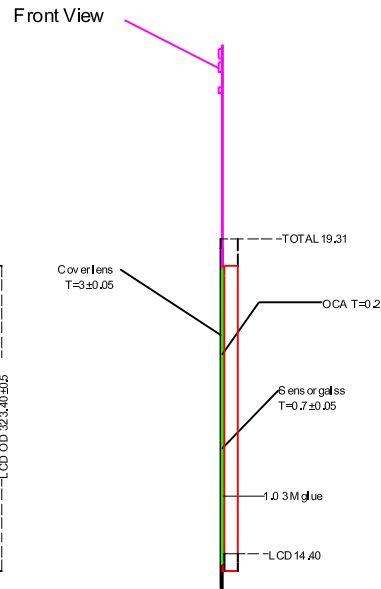


Back View

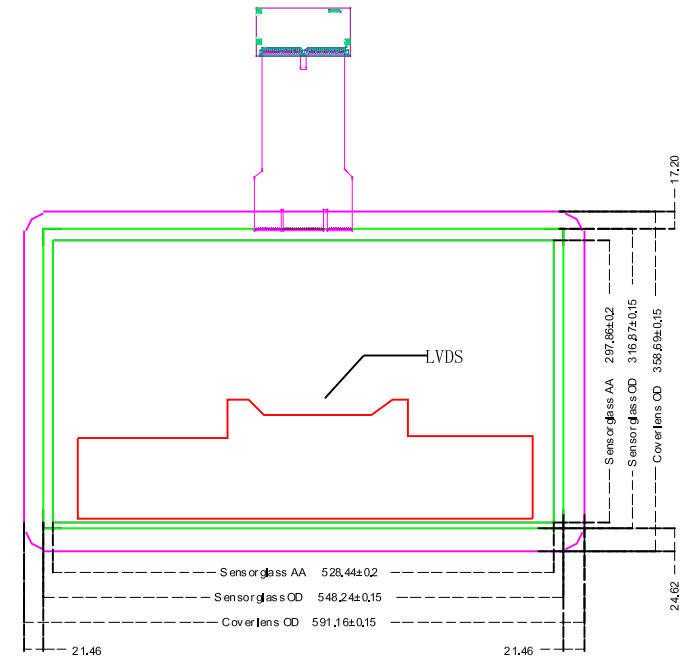

Technical Parameters

- 1:Interface :USB
- 2:Touch point: 10
- 3: Cover lens + Sensor glass + OCA+FPC
- 4: Sensor glass Thickness = 0.7mm
- 5: OCA Thickness = 0.2mm
- 6: Total Thickness = 3.9 mm
- 7: Sensor Process : Print Process (ITO Pattern) + laser line(Ag)
- 8: Input Voltage 3.5V ~ 5.5V, Typical 5V
- 9: Transmittance: >85%
- 10: Surface Hardness: >6H
- 11: Operating Conditions :-10 to 70 °C
- 12: Storage Conditions :-20 to 70 °C
- 13: Relative Humidity: 95% at 60 °C, RH Non-condensing
- 14: Dimension tolerance: ±0.2mm
- 15: Cover lens Thickness = 3mm

NOTES: LM238WR2-SLA1(3M frame paste)

JFCVISION		JFC INDUSTRIAL CO.LTD					
Draw	Chen	2018.03.29	Materials	Glass	23.8"		
Check			Scale	1:1			
Approval	Sim		Units	mm	Drawing Name	23.8 CTP	
		Page 1/1			Drawing No	JFC238C MYY-0	