
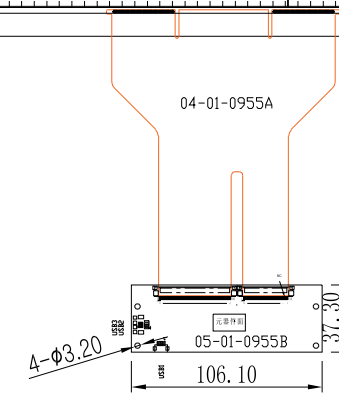



版本	标识	修改内容	修改日期	签名

Back view

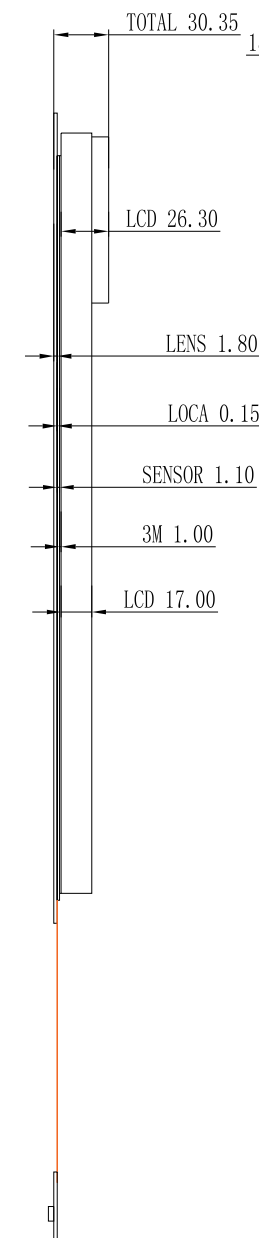

- 1: TP Structure: G+G, temperate glass, Cover surface coated with AR,
- 2: Surface hardness: $\geq 6H$;
- 3: IC:WDT8756, Channels RX78*TX44 ;
- 4: Transmittance: 85% MIN;
- 5: Resolution: X:1920, Y:1080;
- 6: Working Temperature: $-20^{\circ}\sim 65^{\circ}$;
- 7: Storage Temperature: $-30^{\circ}\sim 70^{\circ}$;
- 8: Tolerance range $\pm 0.2\text{mm}$
- 9: All materials are compliant with RoHS

USB 3	
PIN	ID
1	EGND
2	GND
3	D+
4	D-
5	+5V

JFCVISION		JFC INDUSTRIAL CO.,LTD				
Draw	Cindy.deng	2018.07.16	Materials	Glass	MT320-1135A JFC32HB15.V0	
Check			Scale	1:1		
Approv	sim		Units	mm	Name	32 CTP+LCD
		Page1/1			No.	JFC320CMSS.V2