

版本	标识	修改内容	修改日期	签名

Front view

Side view


Back view

Technical parameter:



- 1 Toughened glass cover, structure: G+G
- 2 Transmission rate: ≥85%
- 3 Surface hardness: 6H
- 4 Working environment: -20℃~+70℃, ≤90%RH
- 5 Storage environment: -30℃~+80℃, ≤90%RH
- 6 Tolerance : ±0.2mm

JFCVISION		JFC INDUSTRIAL CO., LTD			
Draw	Cindy, deng	2018. 07. 24	Materials	Glass	S4000J1-KS5
Check			Scale	1:1	
Approv	sim		Units	mm	
		Page1/1		Name	40 CTP+LCD
				No.	JFC400CFSS-V0

Back view

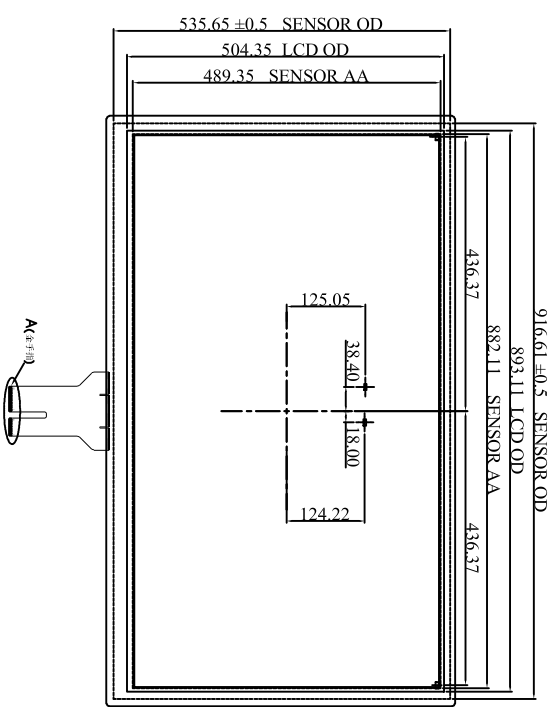

- 1 Toughened glass cover, structure: G+G
- 2 Transmission rate: $\geq 85\%$
- 3 Surface hardness: 6H
- 4 Working environment: $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$, $\leq 90\%\text{RH}$
- 5 Storage environment: $-30^{\circ}\text{C} \sim +80^{\circ}\text{C}$, $\leq 90\%\text{RH}$
- 6 Tolerance : $\pm 0.2\text{mm}$

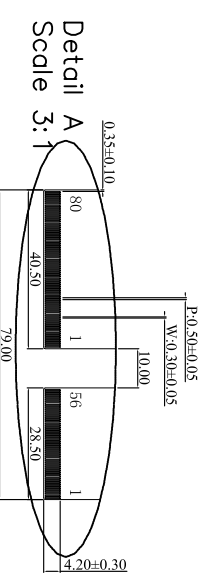

JFCVISION		JFC INDUSTRIAL CO., LTD					
Draw	Cindy.deng	2018.07.24	Materials	Glass	S400J1-KS5		
Check			Scale	1:1			
Approv	sim		Units	mm	Name	40 CTP+LCD	
		Page 1/1			No.	JFC400CFSS.V0	