
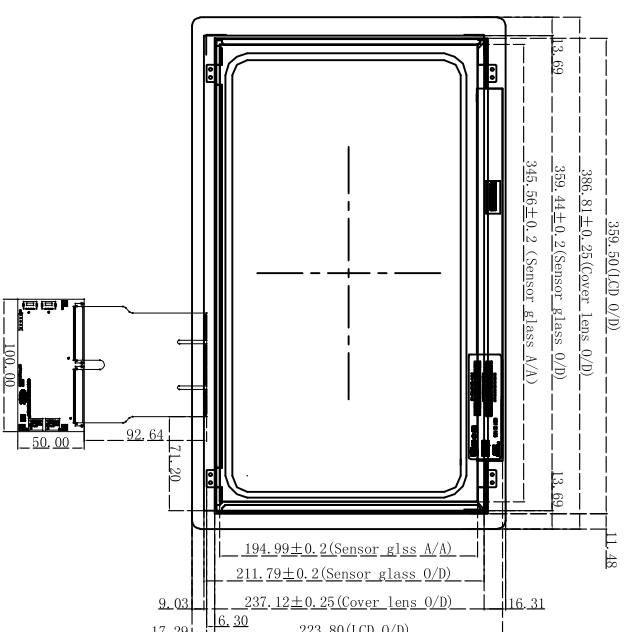


版本	标识	修改内容	修改日期	签名

Front
view

Side view

Back view

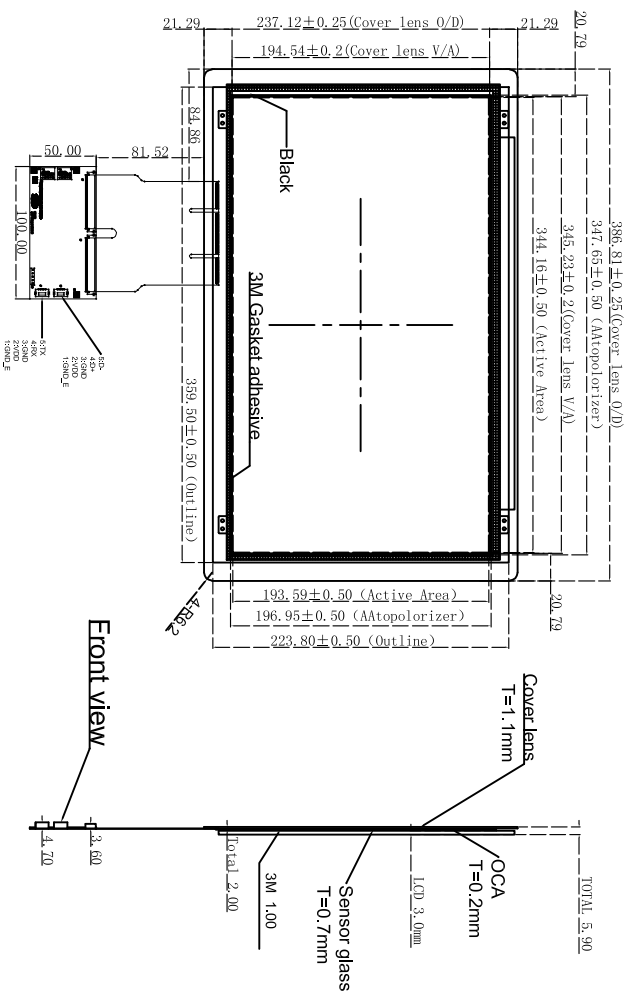

Technical Parameters

0:Interface:USB/UART

1; Touch point: 10 (win7 and win8) ,(UART touch point:2)

2: Cover lens + Sensor glass + OCA+FPC

3: Cover lens Thickness = 1.1mm

4: Sensor glass Thickness = 0.7mm

5: OCA Thickness = 0.2mm

6: Total Thickness = 2mm

7. Sensor Process. Print Process (ITO Pattern +Metal line)

8. Input Voltage 3.5V ~ 5.5V Typical 5V

9. Transmittance: >85%

10: Surface Hardness: >6H

11: Operating Conditions :-10 to 70 °C

11: Operating conditions : -10 to 70 °C

12: Storage Humidity: 20 to 70 °C

14: Dimension tolerance: $\pm 0.2\text{mm}$

JFCVISION		JFC INDUSTRIAL CO., LTD				
Draw	Cindy.deng	2018. 07. 10	Materials	Glass	JFC156CTV-V1.0 NW156FHM-N41	
Check			Scale	1:1		
Approv	sim		Units	mm	Name	15.6 CTP-LCD
		Page 1/1		No.	JFC156CMY.V6	